



GPON OLT MA4000-PX

- Modular device, form factor: 19" 9U eurorack
- 2 switches (uplink controllers) with Hot Standby 1:1
- Up to 16 GPON modules (128 GPON ports)
- Up to 8192 ONT connection
- Switching capacity: 680 Gbps
- Low power consumption
- 2 separate power supplies

Multi-service access and aggregation node MA4000-PX is dedicated for access networks based on GPON technology. The OLT allows operators to construct scalable, fault tolerant "last mile" networks meeting high safety requirements in either urban or rural areas. MA4000-PX controls customer equipment, traffic switching and access to transport networks.

A core element of MA4000-PX is a scalable Ethernet L2+ switch PP4X that interacts with optical access modules PLC8 to connect customer devices via GPON technology.

The modules are installed in a standard 19" 9U eurorack. The 9U case has two slots for PP4X switch circuit control modules and 16 slots for linear PCL8 modules (GPON).

Types of Modules

- PP4X: switching and control module
- PLC8: 8 × GPON 2.5 Gbps interface module
- The quantity of interface modules: up to 16
- Bus type and bandwidth: 34 × 10GBASE-KX (XAUI), 680 Gbps

Management and Monitoring

- Single management interface via CLI (Telnet, SSH, serial), SNMP
- Processing of configuration data of all modules
- Support for RADIUS, TACACS+

Technical Features

General features	
Modules	up to 16 PLC8 modules up to 2 PP4X modules
Physical specifications and environmental parameters	
Number of power supply inputs	2
Power supply voltage	36..72V
Power consumption of full chassis	no more than 850 W
Weight of full chassis	no more than 25 kg
Dimensions (HxWxD)	480 x 400 x 350 mm
Ambient operating temperature	from -10° to +45°C
Ambient operating humidity	up to 80%

Features and Capabilities

Aggregation switch functions with the following capabilities:

- MAC address learning /aging
- MAC address limiting
- Processing of unknown MAC addresses
- Broadband traffic limiting
- Multicast traffic limiting
- Number of multicast groups — 1024
- Support for Q-in-Q in compliance with IEEE 802.1ad
- STP, RSTP, MSTP
- Static routing
- Port isolation, port isolation within the same VLAN
- LAG and LACP (including interfaces of PP4X module)
- Port mirroring, VLAN mirroring
- QoS: 802.1p, DSCP, WRR
- IGMP/MLD Fast Leave
- IGMP/MLD Proxy
- IGMP/MLD Snooping
- IGMP/MLD Querier
- DHCPv4 Snooping
- IPv4 Source guard
- DHCPv4/DHCPv6 Relay Agent (Option 82, IP helper)
- LLDP (802.1ab)
- PPPoE Intermediate agent
- Displaying of ONT services utilization

Standards Compliance

- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-T Fast Ethernet
- IEEE 802.3ab 1000BASE-T Gigabit Ethernet
- IEEE 802.3z Fiber Gigabit Ethernet
- ANSI/IEEE 802.3 NWay auto-negotiation
- IEEE 802.3x Full Duplex and flow control
- IEEE 802.3ad Link aggregation
- IEEE 802.1p Protocol for Traffic Prioritization
- IEEE 802.1Q Virtual LANs
- IEEE 802.1ad Provider Bridges (QinQ)
- IEEE 802.1v VLAN Classification by Protocol and Port
- IEEE 802.3ac VLAN tagging
- IEEE 802.1d MAC bridges
- IEEE 802.1w Rapid Reconfiguration of Spanning Tree
- IEEE 802.1s Multiple Spanning Trees
- IEEE 802.1x Port Based Network Access Control
- ITU-T G.988 GPON
- ITU-T G.984x GPON

Management and Switch Module PP4X

Ethernet Switch

- Bandwidth: 480 Gbps
- MAC address table: 32K entries
- Support for up to 4K VLANs according to 802.1Q
- Quality of Service
- 8 priority output queues per port
- Quantity of ports — 24 ports, up to 10 Gbps per port

Interfaces

- USB (compatible with USB 2.0)
- SATA II (SSD connection is available)

Network Interfaces

- External connections:
 - 4 × 10GBASE-X (SFP+)/1000BASE-X (SFP)
 - 2 × 10/100/1000BASE-T/1000BASE-X (SFP)
- Interface modules connection:
 - 16 × 10G XAUI (10GBASE-KX4)
- Central switch modules connection:
 - 2 × 10G XAUI (10GBASE-KX4)
- Optical transceivers: 1G SFP, 10G SFP+ (Copper)
- Direct Attach connection is available)
- Console port: RS-232

Port Modes

- Duplex/half-duplex mode 10/100/1000 Mbps for electric ports
- Duplex mode for 1/10 Gbps for optical ports

Management and Monitoring

- Interaction with external control and monitoring systems via Telnet, SSH, SNMP
- Access rights limiting: by password, IP address, MAC address, privilege level
- Support for RADIUS, TACACS+
- Collection of alarm data on interface modules and the whole device. Generation of notification and alarm messages for monitoring systems.
- Device temperature control, fan system management
- Software update management for all device modules

Optical Access Module PLC8

Network Interfaces

- Connection with the central switching module:
- 2 x 10G XAUI (10GBASE-KX4)
- PON:
- 8 ports of 2.5/1.25 Gbps GPON (SFP)

Port Modes

- Duplex/half-duplex 10/100/1000 Mbps for electric ports
- Duplex mode 1/10 Gbps for optical ports

Ethernet Switch


- Switch bandwidth: 128 Gbps
- MAC address table: 16K entries
- Support for up to 4K VLANs according to 802.1Q
- Quality of Service

SFP PON Parameters

- Transmission medium: optical cable SMF: 9/125, G.652
- Split ratio: up to 1:64



Management and switch module PP4X

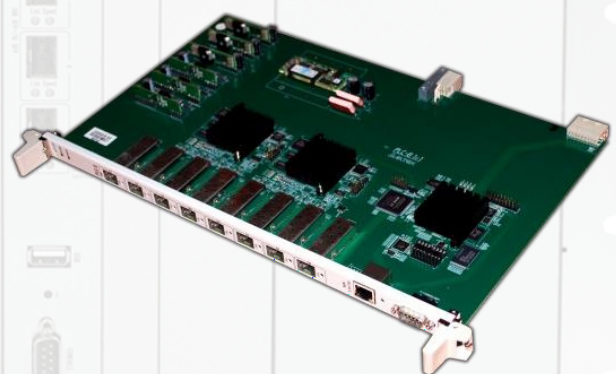

Optical access module PLC8